

# Micro 1012(E)

## Agent Release Control Panel

### GENERAL INFORMATION

S/N 70201602 (120VAC Input)


S/N 70101603 (220VAC Input)

The Micro 1012 is a six zone conventional control panel for single and dual hazard agent releasing applications. The Micro 1012 provides reliable fire detection, signaling and protection for commercial, industrial and institutional buildings requiring agent-based releasing. The control panel is compatible with conventional input devices such as Hochiki two-wire smoke detectors, four-wire smoke detectors, pull stations, waterflow devices, tamper switches and other normally-open contact devices. Refer to the Device Compatibility Document for a complete listing of compatible devices.

Four outputs are programmable as NACs (Notification Appliance Circuits) or releasing circuits. Three programmable Form-C relays (factory programmed for Alarm, Trouble and Supervisory) and 24 VDC special application resettable and non-resettable power outputs are also included on the main circuit board. The Micro 1012 supervises all wiring, AC voltage, battery charger and battery level.

Activation of a compatible smoke detector or any normally-open fire alarm initiating device will activate audible and visual signaling devices, illuminate an indicator, display alarm information on the panel's LCD, sound the piezo sounder at the FACP, activate the FACP alarm relay and operate an optional module used to notify a remote station or initiate an auxiliary control function.

The Micro 1012E offers the same features as the Micro 1012 but allows connection to 220/240 VAC. Unless otherwise specified, the information in this data sheet applies to both the 110/120 VAC and 220/240 VAC versions of the panels.

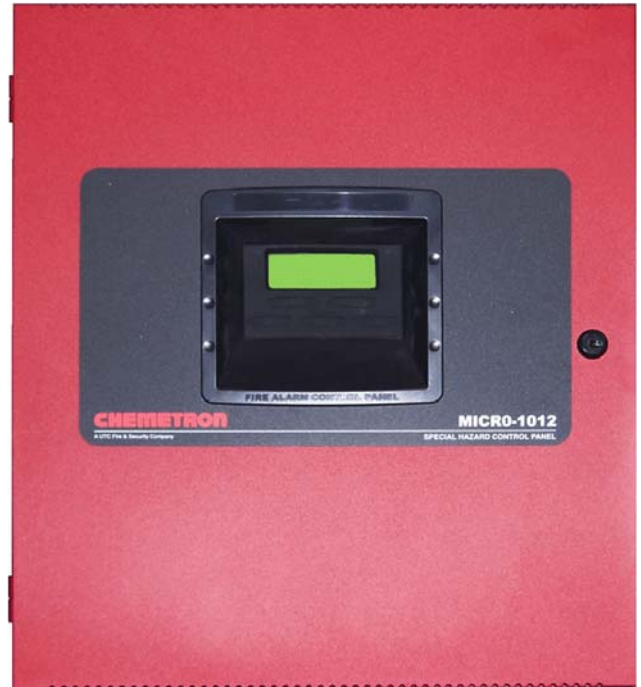

Micro 1012

### FEATURES

- Designed for agent releasing standards NFPA 12, 12A, and 2001
- Disable/Enable control per input zone and output zone
- Extensive transient protection
- Dual hazard operation
- Adjustable pre-discharge, discharge and waterflow delay timers
- Cross-zone (double interlock) capability
- Six programmable Style B (Class B) IDCs (Initiating Device Circuits)
- Four programmable Style Y (Class B) output circuits - (special application power)
- Strobe synchronization
- Three programmable Form-C relays
- 7.0 amps total 24 VDC output current
- Resettable and non-resettable output power
- Built-in programmer
- ANN-BUS for connection to optional (up to 8 total of any of the following):
  - N-ANN-80 Remote LCD Annunciator (S/N 70101604)
  - N-ANN-I/O LED Driver (S/N 70101605)
  - N-ANN-S/PG Printer Module (S/N 70101606)
  - N-ANN-RLY Relay Module (S/N 70101627)
  - N-ANN-LED Annunciator Module (S/N 70101628)

- History log with 256 event storage
- 24 volt operation
- Low AC voltage sense
- Outputs programmable for:
  - Releasing circuits or NACs
- NACs programmable for:
  - Silence inhibit
  - Auto-Silence
  - Strobe synchronization
  - Selective Silence (horn-strobe mute)
  - Temporal or Steady Signal
  - Silenceable or Non-silenceable
  - Release Stage Sounder
- Automatic battery charger with charger supervision
- Optional Dress Panel DP-51050 (red) (S/N 70101608)
- Optional Trim Ring TR-CE (red) for semi-flush mounting the cabinet (S/N 70101609)
- Optional N-CAC-5X Class A Converter Module for Outputs and IDCs (S/N 70101610)
- Optional 4XTM Municipal Box Transmitter Module (S/N 70100777)
- Optional Digital Alarm Communicators (411, 411UD, 411UDAC)

### Programming and Software:

- Custom English labels (per point) may be manually entered or selected from an internal library file
- Programmable Abort operation
- Three programmable Form-C relay outputs
- Preprogrammed and custom application templates
- Continuous fire protection during online programming at the front panel
- Program Check automatically catches common errors not linked to any zone or input point

### User Interface:

- Integral 80-character LCD display with backlighting
- Real-time clock/calendar with automatic daylight savings time adjustment and control
- ANN-Bus for connection to remote annunciators
- Audible or silent walk test capabilities
- Piezo sounder for alarm, trouble and supervisory

## CONTROLS AND INDICATORS

### LED Indicators

- FIRE ALARM (red)
- SUPERVISORY (yellow)
- TROUBLE (yellow)
- AC POWER (green)
- ALARM SILENCED (yellow)
- DISCHARGED (red)
- PREDISCHARGE (red indicator)
- ABORT (yellow indicator)

### Control Buttons

- ACKNOWLEDGE
- ALARM SILENCE
- SYSTEM RESET (lamp test)
- DRILL

### AC Power - TB1:

- **Micro 1012:** 120 VAC, 50/60 Hz, 2.3 amps
- **Micro 1012E:** 240 VAC, 50 Hz, 1.15 amps
- **Wire size:** minimum #14 AWG (2.0 mm<sup>2</sup>) with 600V insulation
- Supervised, nonpower-limited

### Battery (sealed lead acid only) - J12:

- **Maximum Charging Circuit - Normal Flat Charge:** 27.6 VDC @ 1.4 amp Supervised, nonpower-limited
- **Maximum Charger Capacity:** 26 Amp Hour battery (two 18 Amp Hour batteries can be housed in the FACP cabinet. Larger batteries require a separate battery box such as the BB-26, S/N 70101612).
- **Minimum Battery Size:** 7 Amp Hour

### Initiating Device Circuits - TB4 and TB6:

- Zones 1 - 5 on TB4
- Zone 6 on TB6
- Supervised and power-limited circuitry
- Style B (Class B) wiring with Style D (Class A) option
- **Normal Operating Voltage:** Nominal 20 VDC
- **Alarm Current:** 15 mA minimum
- **Short Circuit Current:** 40 mA max
- **Maximum Loop Resistance:** 100 Ohms
- **End-of-Line Resistor:** 4.7K Ohms, 1/2 watt
- **Standby Current:** 4 mA
- Refer to the Device Compatibility Document for compatible listed devices

### Notification Appliance and Releasing Circuit(s) - TB5 and TB7:

- Four Output Circuits
- Style Y (Class B) or Style Z (Class A) with optional converter module
- Special Application power
- Supervised and power-limited circuitry
- Normal Operating Voltage: Nominal 24 VDC
- Maximum Signaling Current: 7.0 Amps (3.0 amps maximum per NAC)
- End-of-Line Resistor: 4.7K Ohms, 1/2 watt
- Maximum Wiring Voltage Drop: 2 VDC
- Refer to the Device Compatibility Document for compatible listed devices.

## Form-C Relays - Programmable - TB8:

- Relay 1 (factory default programmed as Alarm Relay)
- Relay 2 (factory default programmed as fail-safe Trouble Relay)
- Relay 3 (factory default programmed as Supervisory Relay)
- Relay Contact Ratings:
  - 2 amps @ 30 VDC (resistive)
  - 2 amps @ 30 VAC (resistive)

## Auxiliary Trouble Input - J6

The Auxiliary Trouble Input is an open collector circuit which can be used to monitor external devices for trouble conditions. It can be connected to the trouble bus of a peripheral, such as a power supply, which is compatible with open collector circuits.

## Special Application Resettable Power - TB9:

- **Operating Voltage:** Nominal 24 VDC
- **Maximum Available Current:** 500 mA - appropriate for powering 4-wire smoke detectors (see note below)
- Power-limited Circuitry
- Refer to the Device Compatibility Document for compatible listed devices



### NOTE

*TOTAL CURRENT FOR RESETTABLE POWER, NONRESETTABLE POWER AND OUTPUT CIRCUITS MUST NOT EXCEED 7.0 AMPS.*

## Special Application Resettable or Nonresettable Power - TB9:

- **Operating Voltage:** Nominal 24 VDC
- **Maximum Available Current:** 500 mA - appropriate for powering 4-wire smoke detectors (see note above)
- Power-limited Circuitry
- Jumper selectable by JP31 for resettable or nonresettable power

## PRODUCT LINE INFORMATION

**Micro 1012:** Six zone, 24 volt Agent Release Control Panel (includes backbox, power supply, technical manual, and a frame and post instruction sheet) for single and dual hazard agent releasing applications.

**Micro 1012E:** Same as above but allows connection to 220/240 VAC.

**N-CAC-5X (S/N 70101610):** Class A Converter Module can be used to convert the Style B (Class B) Initiating Device Circuits to Style D (Class A) and Style Y (Class B) Output Circuits to Style Z (Class A).



### NOTE

*TWO CLASS A CONVERTER MODULES ARE REQUIRED TO CONVERT ALL FOUR OUTPUT CIRCUITS AND SIX INITIATING DEVICE CIRCUITS.*

**4XTM (S/N 70100777):** Transmitter Module provides a supervised output for local energy municipal box transmitter and alarm and trouble reverse polarity. It includes a disable switch and disable trouble LED.

**N-ANN-80 (S/N 70101604):** LCD Annunciator is a remote LCD annunciator that mimics the information displayed on the FACP LCD display.

**N-ANN-RLY (S/N 70101627):** Relay Module, which can be mounted inside or outside the cabinet, provides 10 programmable Form-C relays.

**N-ANN-S/PG (S/N 70101606):** Serial/Parallel Printer Gateway module provides a connection for a serial or parallel printer.

**N-ANN-I/O (S/N 70101605):** LED Driver Module provides connections to a user supplied graphic annunciator.

**DP-51050 (S/N 70101608):** Dress panel (red) is available as an option. The dress panel restricts access to the system wiring while allowing access to the membrane switch panel.

**TR-CE (S/N 70101609):** Trim Ring (red) is available as an option. The trim ring allows semi-flush mounting of the cabinet.

**BB-26 (S/N 70101612):** Battery box, holds up to two 26 Amp Hour batteries and CHG-75.

**PRN-6 (S/N 70101611):** UL listed compatible event printer. Dot-matrix, tractor-fed paper, 120 VAC.

**PRT-PK-CABLE (S/N 70101607):** Programming cable. Used to update the FACP's flash firmware. (Also requires an RS485 to RS232 converter.)

## SYSTEM SPECIFICATIONS

---

### System Capacity:

- Annunciators = 8

### Electrical Specifications:

- **Micro 1012:** 120 VAC, 50/60 Hz, 2.3 amps
- **Micro 1012E:** 240 VAC, 50 Hz, 1.15 amps
- **Wire size:** minimum 14 AWG (2.0 mm<sup>2</sup>) with 600 V insulation, supervised, nonpower-limited

### Cabinet Specifications:

- **Door:** 19.26" high x 16.82" wide x 0.72" deep (48.92 cm x 42.73 cm x 1.82 cm)
- **Backbox:** 19.00" high x 16.65" wide x 5.25" deep (48.26 cm x 42.29 cm x 13.34 cm)
- **Trim Ring:** 22.00" high x 19.65" wide (TR-CE) (55.88 cm x 49.91 cm)

### Shipping Specifications:

#### Dimensions:

- Height = 22.00" (50.80 cm)
- Width = 22.50" (57.15 cm)
- Depth = 8.50" (21.59 cm)

### Temperature & Humidity Ranges:

This system meets NFPA requirements for operation at 0 - 49°C / 32 - 120°F, and at a relative humidity of 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F). However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 - 27°C / 60 - 80°F.

### NFPA Standards:

The Micro 1012(E) complies with the following NFPA 72 Fire Alarm Systems requirements:

- **NFPA 12** - CO2 Extinguishing Systems
- **NFPA 12A** - Halon 1301 Extinguishing Systems
- **NFPA 72** - National Fire Alarm Code for Local Fire Alarm Systems and Remote Station Fire Alarm Systems (requires an optional Remote Station Output Module)
- **NFPA 2001** - Clean Agent Fire Extinguishing Systems

### Agency Listings and Approvals:

In some cases, certain modules may not be listed by certain approval agencies, or listings may be in process. Consult CFS National Product Manager for latest listing status.

- **UL:** Listed to UL 864, Revision 9 Standard



2316 So. 24<sup>th</sup> Street  
Omaha, NE 68108  
800.550.1AFP (1237) toll free  
402.733.2800 voice  
402.344.7469 fax  
www.associatedfire.net  
E-mail: info@associatedfire.net