

## xWatch® Explosion-Proof Camera with X-Series Flame Detectors



xWatch with X3301

### DESCRIPTION

The xWatch® Surveillance Camera can be attached directly to any of the Det-Tronics X-Series line of flame detectors through a factory installed integral connection adapter. With this arrangement, the camera views the same protected area as the detector.

The xWatch Surveillance Camera produces a high resolution color video picture using a camera module that is mounted inside an explosion-proof NEMA 4X rated housing. The device's explosion-proof rating makes it suitable for Class I, Div. 1, Groups B, C and D locations.

The xWatch and X-Series combination can be used in any fire and gas system application that requires CCTV surveillance capabilities.

In the event of a fire or gas alarm, the operator can immediately view the monitored area to determine whether personnel are present and safe. An accurate evaluation of the hazard's size, nature, location and severity can be determined quickly and safely.

The utilization of a digital video recorder (DVR) captures the video image of an incident which can be analyzed for what happened before, during, and after the event.

### FEATURES AND BENEFITS

#### xWatch / Flame Detector Combination

- Combine with any X-Series flame detector
- Provides high resolution color video surveillance and flame detection, all in real time
- Views the same 90 degree cone of vision as the flame detector
- Superior false alarm rejection
- Real verification of detection capability with automatic and magnetic optical integrity
- Combine with detector system upgrades in remaining unused detector locations
- Compatible with LON based detectors
- Ideally suited for remote and/or inaccessible areas
- Informed, appropriate response to incidents
- Pre- and post-event analysis of video recording
- Standard or custom DVR options available
- System integrable for alarm and detection recording

# SPECIFICATIONS

## xWatch Specifications


<b>Operating Temperature</b>	-20°C to +70°C
<b>Storage Temperature</b>	-30°C to +80°C
<b>Relative Humidity</b>	5 to 95%, non-condensing
<b>Ingress Protection</b>	NEMA/Type 4X
<b>Sensor</b>	Color low light CCD, 0.3 lux
<b>Resolution</b>	NTSC: 768 by 494 pixels, 570 lines of resolution PAL: 752 by 582 pixels, 570 lines of resolution
<b>Video Output</b>	NTSC or PAL two wire twisted pair
<b>Shutter</b>	Electronic shutter, 1/60 – 1/100,000 second
<b>Operating Voltage</b>	24 VDC nominal, 18 to 30 VDC
<b>Power Consumption</b>	2.8 watts (camera only)
<b>Field of View</b>	90 degrees
<b>User Interface</b>	Conventional off-the-shelf video switchers and controllers can be used for the interface.
<b>Housing Material</b>	Aluminum or 316 Stainless Steel
<b>Shipping Weight</b>	Aluminum: 7 pounds (3.2 kg) (Camera/Detector Combo) Stainless Steel: 12 pounds (5.5 kg)
<b>Flame Performance</b>	Refer to the Instruction Manual for the specific detector model:

<b>Detector</b>	<b>Instruction Manual</b>
X3301	95-8527
X3302	95-8576
X5200	95-8546
X2200	95-8549
X9800	95-8554


**Certifications** FM/CSA: Class I, Div. 1, Groups B, C and D (T5).  
Class II, Div. 1, Groups E, F, and G (T5).  
NEMA/Type 4X.

ATEX: CE 0539 II 2 G  
(Pending)


**Field of View** xWatch provides a 90 degree field of view to cover the same area as the X-Series Flame Detector.



Field of View of X3301 at Indicated Distance in Feet for n-Heptane



Field of View of X3301 at Indicated Distance in Feet for Methane

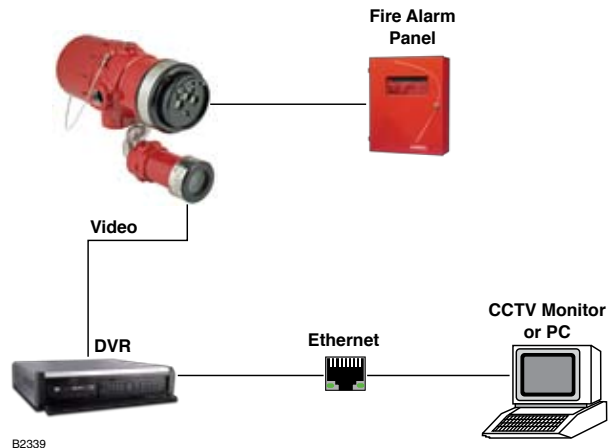

System Block Diagram

Specifications subject to change without notice.

Det-Tronics the DET-TRONICS logo, and xWatch are registered trademarks or trademarks of Detector Electronics Corporation in the United States, other countries, or both. Other company, product, or service names may be trademarks or service marks of others.

©Copyright Detector Electronics Corporation 2009. All rights reserved.



2316 So. 24<sup>th</sup> Street  
Omaha, NE 68108  
800.550.1AFP (1237) toll free  
402.733.2800 voice  
402.344.7469 fax  
www.associatedfire.net  
E-mail: info@associatedfire.net

**Detector Electronics Corporation**